

Transaction Information

Tool ID	ETX2300U6
Tool Status	Disconnected
Location	Malta, USA
Wafer Size	300 mm
Fab Section	Etch
Tool Available Date	2023-09-07

General Product Information

Vendor Supplier	LAM
Model	2300 KIYO FX
Vintage	2017
Serial No	KFXE-482(F1514910) - PM3, PM2, PM4
Asset Description	ETX2300U2-T LAM-E5 KIYO FX HYDRA ARIA CORVUS-UPGRADE TO REPURPOSE ETX
Software Version	2300 System Platform
CIM	NONE
Process	FEOL Patterning

Hardware Configuration (Fab)

System Type	Description	Quantity	Status
Main System	2300 KIYO FX Chambers	3	OK
Handler System	NA		
Factory Interface	NONE		
Others			

Hardware Configuration (Subfab / Auxilliary Units)


Description	Quantity	Status

Missing/Faulty Parts / Accesorries List

Description	Quantity
NONE	

Tool Pictures

General	Chambers
---------	----------

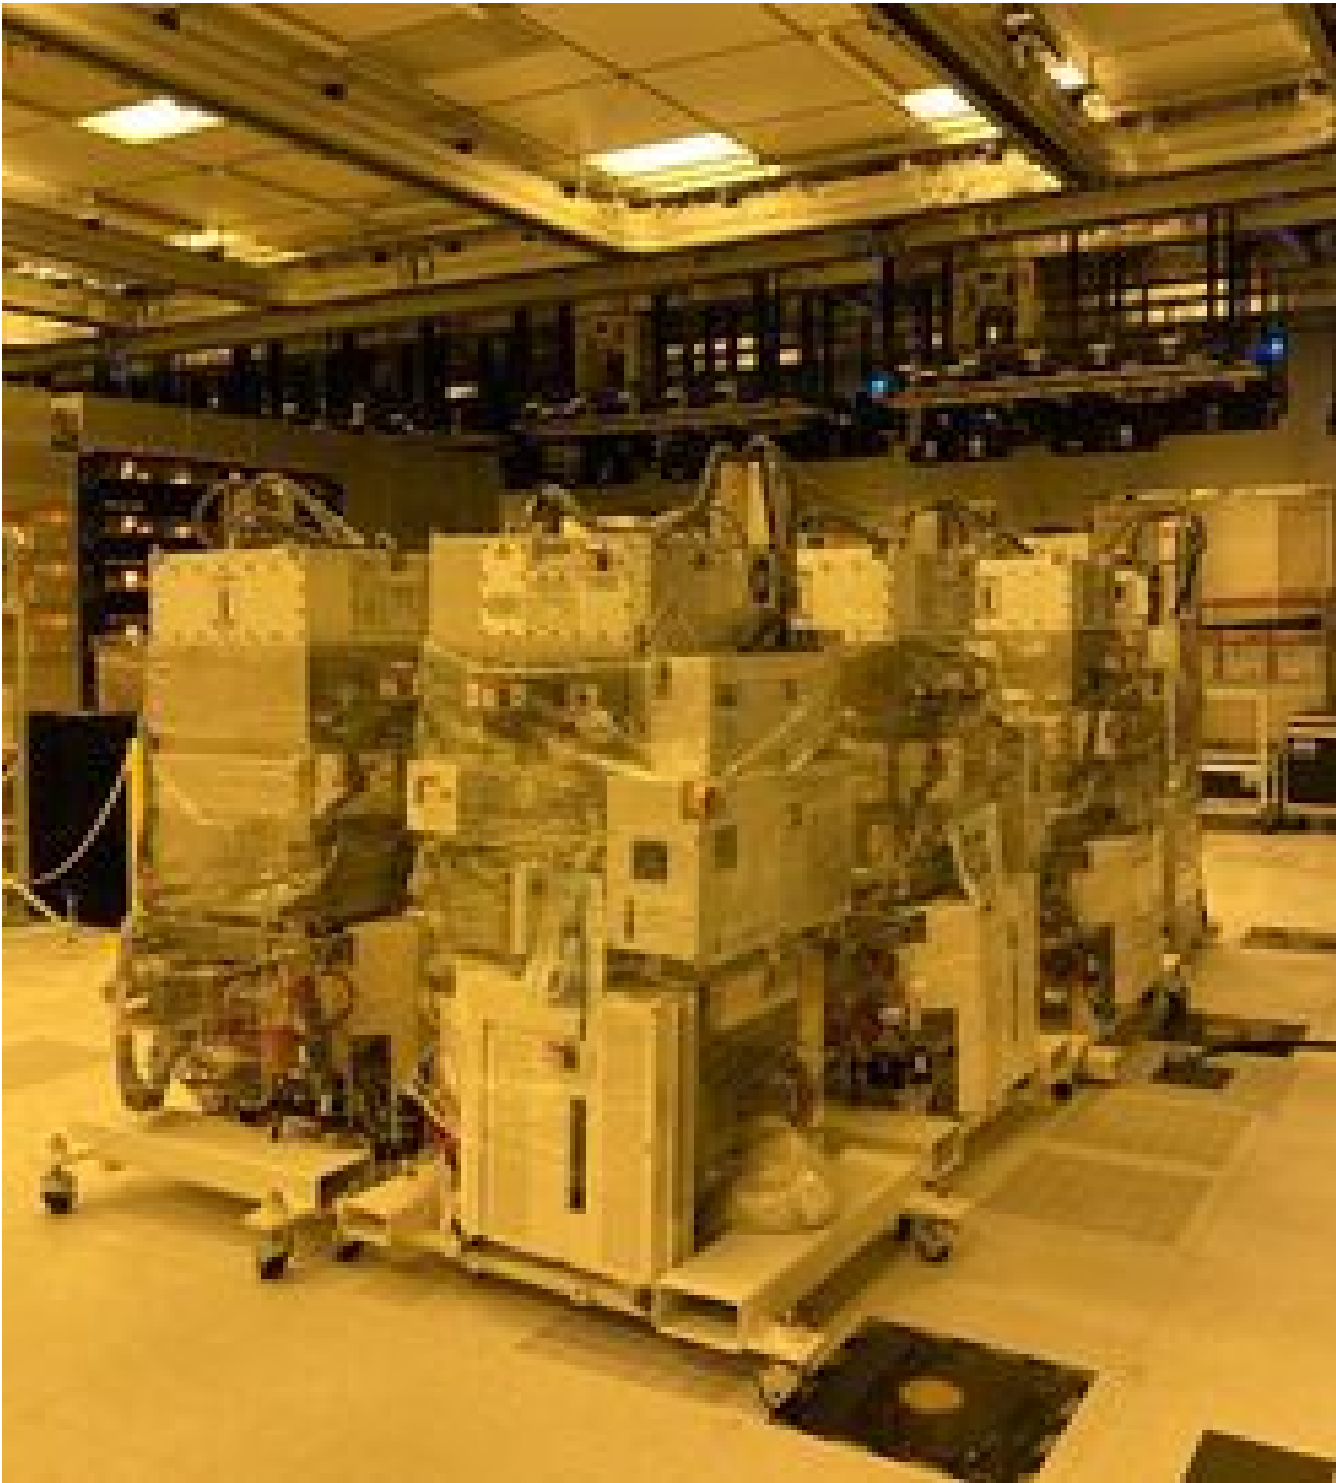



MODEL NO. 2300[®] KIYO[®] EX

SERIAL NO. KFXE-481 (F157910-PM2)

YEAR OF MANUFACTURE: 2017

SYSTEM INTERCONNECT: 224-800096-815

SUPPLY CIRCUIT VOLTAGE RATING:

208VAC +10%, -10%

FREQUENCY: 50/60 Hz

SUPPLY CIRCUIT RATING:

3Ø Δ, 3 WIRE + PROTECTIVE GND

FULL-LOAD CURRENT: 47.1 AMP

NON CONT. CURRENT: 32.1 AMP

CONT. CURRENT: 22.00 AMP

RATING OF LARGEST LOAD: 13 AMP

MAIN CB INTERRUPTING CAPACITY: 35KA

MAIN CB CURRENT RATING: 80 AMP

765-360102-805



MODEL NO. 2300[®] KIYO[®] FX

SERIAL NO. KFXE-483 (F157910-PM4)

YEAR OF MANUFACTURE: 2017

SYSTEM INTERCONNECT: 224-800096-815

SUPPLY CIRCUIT VOLTAGE RATING:

208VAC +10%, -10%

FREQUENCY: 50/60 Hz

SUPPLY CIRCUIT RATING:

3 ϕ Δ , 3 WIRE + PROTECTIVE GND

FULL-LOAD CURRENT: 47.1 AMP

NON CONT. CURRENT: 32.1 AMP

CONT. CURRENT: 22.00 AMP

RATING OF LARGEST LOAD: 13 AMP

MAIN CB INTERRUPTING CAPACITY: 35KA

MAIN CB CURRENT RATING: 80 AMP

785-290102-806

Additional Configuration Files